

配線槽

WIRING DUCTS




PLASTIC WIRING DUCTS

(40) 絕緣配線槽

- ◎ 材質：採用硬質PVC料精製
- ◎ 顏色：灰色；乳白色、白色亦可接受訂製
- ◎ 特點：絕緣佳、不自燃

- Material: Rigid, high impact, self-extinguishing PVC (gray)
- Used primarily in control panels, the restricted slot design allows wires to be added or removed by simply deflecting the fingers on the side of the duct.
- Solid type wiring ducts also available

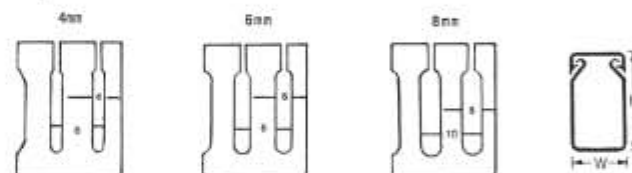

品名 ITEM NO.			尺寸 DIMENSIONS W x H mm	電線容量 以2.0平方計算 WIRES TO BE CONTAINED	長 度 LENGTH
出線孔尺寸 SLOT HOLE SIZES					
4mm	6mm	8mm			
WD1525-4		WD1525-8	15 x 25	5-12pcs	1.7M/pc
WD2525-4	WD2525-6	WD2525-8	25 x 25	10-25pcs	
WD2545-4	WD2545-6	WD2545-8	25 x 45	20-25pcs	
WD2565-4	WD2565-6	WD2565-8	25 x 65	40-45pcs	
WD3333-4	WD3333-6	WD3333-8	33 x 33	25-45pcs	
WD3345-4	WD3345-6	WD3345-8	33 x 45	40-55pcs	
WD3365-4	WD3365-6	WD3365-8	33 x 65	60-75pcs	
		WD33100-8	33 x 100	180-200pcs	
WD4040-4		WD4040-8	40 x 40	60-70pcs	
WD4060-4	WD4060-6	WD4060-8	40 x 60	100-115pcs	
WD4545-4	WD4545-6	WD4545-8	45 x 45	60-70pcs	
WD4565-4	WD4565-6	WD4565-8	45 x 65	110-120pcs	
		WD48100-8	48 x 100	215-250pcs	
		WD50100-8	50 x 100	200-250pcs	
WD5050-4	WD5050-6	WD5050-8	50 x 50	80-90pcs	
WD6060-4	WD6060-6	WD6060-8	60 x 60	120-135pcs	
WD6080-4		WD6080-8	60 x 80	180-210pcs	
WD6545-4	WD6545-6	WD6545-8	65 x 45	110-120pcs	
WD6565-4	WD6565-6	WD6565-8	65 x 65	180-200pcs	
		WD70100-8	70 x 100	250-300pcs	
		WD7575-8	7 5x 75	200-250pcs	
WD8080-4		WD8080-8	80 x 80	240-290pcs	
		WD10050-8	100 x 50	200-250pcs	
WD10060-4		WD10060-8	100 x 60	240-290pcs	
		WD10075-8	100 x 75	260-320pcs	
		WD100100-8	100 x 100	300-400pcs	
		WD15075-8	150 x 75	335-500pcs	
		WD150100-8	150 x 100	450-600pcs	




SOLID-TYPE WIRING DUCT

(42) 密閉式絕緣配線槽

MOUNTING HOLE DIMENSIONS

Mounting Hole Dimensions 底槽固定孔

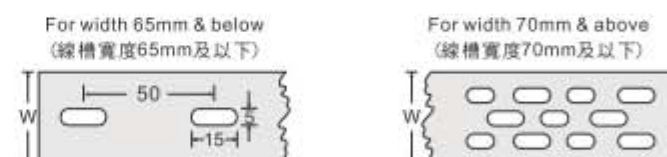

配線槽

WIRING DUCTS




DECORATION WIRING DUCTS

(45) 裝潢配線槽

- ◎ 材質：採用硬質PVC料精製
- ◎ 顏色：白色；灰色、棕色亦可接受訂製
- ◎ 特點：絕緣佳、不自燃

- Material: Rigid PVC, backed with quality self-adhesive tape
- Color: White (Grey, brown, other colors are available upon request)
- For Use: Designed for protection and decoration



品名 ITEM NO.	尺寸 Dimensions		電線容量 wire contained pcs 以0.8m/m 電話線計算	長度 LENGTH
	W mm	H mm		
DD-1	13.4	10.5	4	1M/ piece (背膠)
DD-2	21	12	7	
DD-3	25.7	11.4	10	
DD-4	30	15.7	15	
DD-5	38	11	10-18對	
DD-6	50.8	11	15-25對	




TELEPHONE WIRING DUCTS


(45) 電話配線槽

- ◎ 材質：採用硬質PVC料精製
- ◎ 顏色：乳色；灰色、白色亦可接受訂製
- ◎ 特點：絕緣佳、不自燃


- Material: Rigid PVC, backed with quality self-adhesive tape
- Color: Ivory (Grey, white, other colors are available upon request)
- For Use: Designed to protect wires on floor

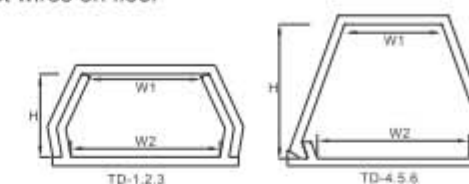

品名 ITEM NO.	尺寸 Dimensions			電線容量 wire contained pcs 以0.8m/m 電話線計算	長度 LENGTH
	W1 mm	W2 mm	H mm		
TD-1	10.5	9.5	6	2	1M/ piece (背膠)
TD-2	13	12.5	7	4	
TD-3	13	14	9.5	6	
TD-4	13.5	16.5	12	9	
TD-5	15	19	15	14	
TD-6	14	19.5	20	18	
TD-8	28.5	39.5	16.5	30	




配線槽 WIRING DUCTS

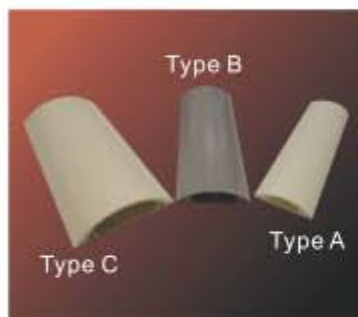

- Material: Rigid PVC, backed with quality self-adhesive tape
- Color: Ivory (grey, coffee, other colors are available upon request)
- For Use: Designed to protect wires and for slide movement on the floor
- Soft round type wiring ducts for "roll-1M without self-adhesive tape" packing (RDS series) are also available

Type A - ROUND TYPE WIRING DUCT 外覆式無隔板型



品名 ITEM NO.	尺寸 Dimensions				長度 LENGTH
	W mm	W1 mm	H mm	H1 mm	
RD-20	20	8	6.5	4	1M/ pc (背膠)
RD-30	30	12	8.5	6	
RD-40	40	16.5	10.5	8	
RD-50	50	29.5	11.5	7.5	
RD-60	60	33	14	11.5	

ROUND TYPE WIRING DUCTS


(45) 半圓弧地板型配線槽

- ◎ 材質：採用硬質PVC料精製
- ◎ 顏色：乳色；灰色、咖啡色亦可接受訂製
- ◎ 特點：絕緣佳、不自燃
- ◎ 亦有整捲軟質半圓弧地板型配線槽




RDS series

Type B - ROUND TYPE WIRING DUCT WITH ONE MIDDLE PLATE 外覆式有隔板型




品名 ITEM NO.	尺寸 Dimensions				長度 LENGTH
	W mm	W1 mm	H mm	H1 mm	
RD-70	70	40	16	12.5	1M/ pc (背膠)
RD-90	90	45	21	16.5	
RD-120	120	71.5	25.5	21.5	

Type C - ROUND TYPE COVER INSIDE WIRING DUCT 內覆式無隔板型



品名 ITEM NO.	尺寸 Dimensions				長度 LENGTH
	W mm	W1 mm	H mm	H1 mm	
RDI-50	50	21	13.5	9	1M/ pc (背膠)
RDI-70	70	41.5	19	15	
RDI-90	90	59.5	22.5	19	
RDI-120	120	87	28	24	

配線槽 WIRING DUCTS



DOUBLE-SIDED FOAM TAPE (47) 雙面膠帶

- ◎ 材質：DSTC (布質膠)
- DSTP (泡棉膠)
- ◎ 特點：黏性強、附着力佳

- Material: Rubber adhesive (Acrylic one is also available)
- Tape width and packing can be of your option if not listed
- For Use: Applied for mounting and holding

品名 ITEM NO.	泡棉 Foam	寬 Width mm (in.)	用途 For	長度 LENGTH
DSTC-08	Thin Adhesive (Cloth Type) 布質雙面膠帶	8 (0.32")	● Telephone System電話配線槽 ● Mounting 固定座 ● Display Signs 陳列標示 ● Packing 包裝用	10M or 50 M/roll
DSTC-10		10 (0.39")		
DSTC-12		12 (0.47")		
DSTC-14		14 (0.71")		
DSTC-18		18 (0.71")		
DSTC-22		22 (0.87")		
DSTP-19	PE 泡棉雙面膠帶	19 (0.75")		
DSTP-28		28 (1.1")		



WDC-01




WDC-02

- ◎ 適用裁切配線槽寬度65mm及以下的尺寸
- Used to wiring duct width 65mm and below

WIRING-DUCT CUTTER (99) 線槽剪

品名 ITEM NO.	可剪線槽寬度 WIRING DUCTS WIDT H mm	包裝 PACKING	備註 REMARK
WDC-01	65	1 PCS	For wiring ducts width 65mm and below
WDC-02	38	1 PCS	Cut square PVC pipe of dia. 1-1/4" (max. O.D. 38mm) with adaptor or telephone wiring ducts




配線標誌 CABLE MARKER



CABLE MARKERS (50) PVC 配線標誌圈

- ◎ 材質：軟質PVC料精製
- ◎ 顏色：黃底黑字或白底黑字

- Material: Soft durable PVC
- Available with all standard figures, letters and symbols in black on yellow, or black on white
- Very flexible in use

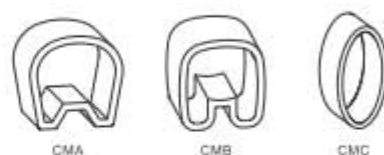

品名 ITEM NO.	最小至最大內徑 DIA. RANGE mm ²	標準標示 STD. MARKING	長度 LENGTH
CMA-0	2.0~3.2	Solid number or letter per roll for 0~9, A~Z, +, -, =, /, blank	1000 pcs / roll
CMA-1	3.0~4.2		500 pcs / roll
CMA-2	3.6~7.4		
CMA-3	5.2~10.0		250 pcs / roll
CMB-0	2.0~3.2		1000 pcs / roll
CMB-1	3.0~4.2		500 pcs / roll
CMB-2	3.6~7.4		
CMC	3.5~7.0		



CABLE MARKER STRIP (50) 標誌帶

- ◎ 材質：Nylon 6/6
- ◎ 防火等級：UL94V-2
- ◎ 顏色：黑色，白色可訂製

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Black (White color is also available upon request)

品名 ITEM NO.	長度 LENGTH mm	寬度 WIDTH mm	長度 LENGTH
CMS-065	65	9	100 pcs / bag
CMS-100	100	9	
CMS-135	135	9	



MARKER PLATE (50) 標誌銘牌

- Material: Nylon 66
- Flammability: UL94V-2
- ◎ 材質：Nylon 6/6

品名 ITEM NO.	長度 LENGTH (mm)	寬度 WIDTH mm	厚度 THICKNESS (mm)	包裝 PACKING
MP-1	26	15	1.2	100 pcs / bag
MP-2	42	21	1.2	
MP-3	60	25	1.2	
MP-4	62	51.5	1.3	



MARKING PEN (99) 速乾筆

- Y.Y. Marker Ties have a tag moulded to the tie which can be written on using our MP-1 Marking Pen

品名 ITEM NO.	顏色 Color	包裝 PACKING
MP-1	Black	12 pcs/box

配線標誌 CABLE MARKER



OM TYPE MARKERS (50) OM型標誌圈

- ◎ 材質：軟質PVC，可耐70度C
- ◎ 顏色：白底黑字
- ◎ 特點：易安裝，可絕緣，於切斷處判斷即可使用
- ◎ 100M/捲的空白標誌套管亦可承裝

- Material: Soft durable PVC
- Service temp: up to 70°C
- Special marking is available upon request
- 100M per roll with blank mark also available

品名 ITEM NO.	長度 LENGTH mm	適用電線尺寸 WIRE SIZE mm ²	內徑 WIRE DIA. mm	標準標示 STD. MARKING	包裝 PACKING
OMM-0.75	10	0.75	3	Solid number or letter per roll for 0~99, A~Z, +, -, =, /, blank	100 pcs / bag
OMM-1.25	10	1.25	3.2		
OMM-2.0	10	2	3.6		
OMM-3.5	10	3.5	4.2		
OMM-5.5	10	5.5	5.1		
OMM-8.0	10	8	6.2		
OMM-14.0	10	14	7.6		
OMM-22.0	10	22	9.1		




CLIP-ON CABLE MARKER (50) 插入式配線標誌

- ◎ 材質：Nylon
- ◎ 筆狀插入標誌，不佔空間，易於攜帶，插上電線即可嵌入標誌

- Marker material: Nylon
- Working temp.: -20°C ~ 60°C
- Color: Black legends on white background
- Available with standard figure, letter and symbols
- Removable and reusable. All markers are supplied on handy application with speed installation




COM-0-1



COM-2-6

品名 ITEM NO.	內徑 I.D. φ d mm	外徑 O.D. φ D mm	L (mm)	適用電線外徑 WIRE SIZE	號碼 MARKING	桿子顏色 SHAFT COLOR	包裝 PACKING
COM-0	0.90	1.70	2.3	0.95-1.3mm	Solid number or letter for 0~9 A~Z +, -	dark red	10 pcs / bag
COM-1	1.80	2.80	3	1.9-2.2mm		light blue	
COM-2	2.40	3.40		2.5-2.8mm		green	
COM-3	2.70	3.90		2.8-3.4mm		red	
COM-4	2.90	4.60		3.4-4.6mm		blue	
COM-5	3.70	5.10		3.9-4.5mm		brown	
COM-6	4.40	5.80		4.6-5.9mm		yellow	

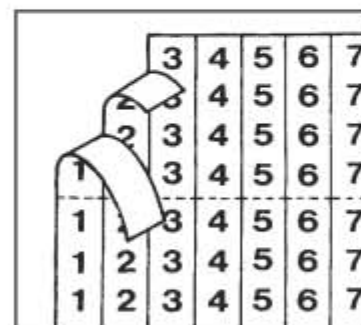

MARKER CARDS (50) 布質配線標誌

- Material: cloth marker
- Solid, consecutive legends, or black cards in different width or length available
- Stick on wire for permanent identification
- ◎ 材質：採附背膠之軟布，上印文字及代號



品名 ITEM NO.	可印範圍寬度 WIDTH mm	可印範圍長度 Length mm	標準標示 STD. MARKING	包裝 PACKING
WSM-20	5	22.9	Solid number or letter for 0~100, A~Z, +, -	70pcs per sheet, 50 sheets per box
WSM-40	8	22.9		

電纜固定頭

CABLE GLANDS



NYLON CABLE GLANDS

(70) MM型尼龍電纜固定頭

- ◎ 材質：Nylon，夾緊圈EDPM橡膠材質
- ◎ 防火等級：UL 94V-2
- ◎ 顏色：黑色、灰色、灰白色

- Material: UL approved polyamide; EDPM for seal insert (other NBR material is also available)
- Flammability: UL 94V-2
- Color: Black, Grey, Light Grey
- Protection: made to comply with Ip68
- Operating temperature: -40°C up to +100°C
- ◎ 特點：1. 夾緊圈經特殊設計，拉力強，對電纜不造成損傷。
- 2. 電纜可直接穿入鎖緊，省時方便。
- 3. 可防塵防水
- ◎ 用途：一般機械控制箱、配電盤、機器等電纜固定保護用。



品 名 ITEM NO.	CABLE GLAND BODY DIMENSIONS				SEAL DIMENSIONS	LOCK NUT DIMENSIONS		包 裝 PACKING
	Type MM	適用電纜外徑 CABLE RANGE	螺紋長度 LENGTH L mm	SW mm	I.D. mm	SW mm	H mm	
MM-12X08	M12*1.5	3-6.5	8	15	7	19	5	50 pcs / bag
MM-16X10	M16*1.5	4-10	10	22	11.2	22	5	
MM-16X15	M16*1.5	4-10	15	22	11.2	22	5	
MM-20X10	M20*1.5	7-14	10	27	14.4	24	5	
MM-20X15	M20*1.5	7-14	15	27	14.4	24	5	
MM-25X10	M25*1.5	9-18	10	33	19	33	6	
MM-25X15	M25*1.5	9-18	15	33	19	33	6	25 pcs / bag
MM-32X10	M32*1.5	14-25	10	42	26	42	7.5	
MM-32X15	M32*1.5	14-25	15	42	26	42	7.5	10 pcs / bag
MM-40X15	M40*1.5	18-28	18	53	33	53	8	
MM-50X15	M50*1.5	24-35	18	60	40	60	8	5 pcs / bag
MM-63X15	M63*1.5	35-48	18	70	49	75	8	

電纜固定頭

CABLE GLANDS



NYLON CABLE GLANDS

(70) PG型尼龍電纜固定頭

- ◎ 材質：Nylon，夾緊圈EDPM橡膠材質
- ◎ 防火等級：UL 94V-2
- ◎ 顏色：黑色、灰色、灰白色

- Material: UL approved polyamide; EDPM for seal insert (other NBR material is also available)
- Flammability: UL 94V-2
- Color: Black, Grey, Light Grey
- Protection: made to comply with Ip68
- Operating temperature: -40°C up to +100°C
- PG series is equipped with cable gland body, seal and lock nut only
- ◎ 特點：1. 夾緊圈經特殊設計，拉力強，對電纜不造成損傷。
- 2. 電纜可直接穿入鎖緊，省時方便。
- 3. 可防塵防水
- ◎ 用途：一般機械控制箱、配電盤、機器等電纜固定保護用。



品 名 ITEM NO.	CABLE GLAND BODY DIMENSIONS				SEAL DIMENSIONS	LOCK NUT DIMENSIONS		包 裝 PACKING
	Type MM	適用電纜外徑 CABLE RANGE	螺紋長度 LENGTH L mm	SW mm	I.D. mm	SW mm	H mm	
PG-07	07	3-6	8	15	7	19	5	100 pcs / bag
PG-09	09	4-8	9	19	8	19	5	
PG-11	11	5-10	10	22	11.2	22	5	
PG-13.5	13.5	6-12	10	24	12	27	6	
PG-16	16	8-14	10	27	14.4	26	5	
PG-21	21	10-18	11	33	19	33	6	50 pcs/bag
PG-29	29	16-25	11	42	26	42	7.5	25 pcs/bag
PG-36	36	22-32	14	53	33	53	8	10 pcs/bag
PG-42	42	28-38	14	60	40	60	8	
PG-48	48	35-44	15	70	49	72	9	5 pcs/bag




NYLON CABLE GLANDS

(72) NPT型尼龍電纜固定頭

- ◎ 材質：Nylon，夾緊圈EDPM橡膠材質
- ◎ 防火等級：UL 94V-2
- ◎ 顏色：黑色、灰色、灰白色

- Material: UL approved polyamide; EDPM for seal insert (other NBR material is also available)
- Flammability: UL 94V-2
- Color: Black, Grey, Light Grey
- Protection: made to comply with Ip68
- Operating temperature: -40°C up to +100°C




品名 ITEM NO.	CABLE GLAND BODY DIMENSIONS				SEAL DIMENSIONS		包裝 PACKING
	Type NPT	適用電纜外徑 CABLE RANGE	螺紋長度 LENGTH L mm	SW mm	I.D. mm		
NPT-3/8"	3/8"	5-10	15	19	8		150pcs/bag
NPT-1/2"	1/2"	6-12	15	24	12		100pcs/bag
NPT-3/4"	3/4"	9-18	15	33	19		50 pcs/bag
NPT-1"	1"	14-25	18	42	26		25 pcs/bag



PC 板固定零件 P.C.B. FASTENERS



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Natural
- Lift wires off board to avoid hot components and minimize transient in interference
- Resists to vibration or shock
- Mounting hole diameter $\Phi 4.8\text{mm}$



LOCKING WIRE SADDLE


(80) 隔離束線座

- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2
- ◎ 顏色: 本色
- ◎ 適用機孔 $\Phi 4.8\text{mm}$

品名 ITEM NO.	機板厚度 D PCB THICKNESS	尺寸 Dimensions			包裝 PACKING
		A mm	B mm	C mm	
WS-05	2.0	12.7	11.0	4.0	500 pcs / bag
WS-10		17.9	11.0	8.6	
WS-11		26.9	11.0	18.2	



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Lifts and routes wires
- Improve circuit safety by over-routing hot components
- Mounting hole diameter $\Phi 4.8\text{mm} \sim \Phi 5.0\text{mm}$



TWIST HOLDERS


(80) 隔離扭線環

- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2
- ◎ 顏色: 本色
- ◎ 適用機孔 $\Phi 4.8\text{mm} \sim \Phi 5.0\text{mm}$

品名 ITEM NO.	機板厚度 E PCB THICKNESS	尺寸 Dimensions				包裝 PACKING
		A mm	B mm	C mm	D mm	
TH-03	0.5~2.0	$\Phi 11.5$	19.55	10.50	14.00	1000 pcs / bag
TH-04		$\Phi 20$	16.2	10.40	16.00	
TH-10		$\Phi 7.0$	32.30	10.50	14.00	



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Natural



MINIATURE SUPPORT POST

(80) PC板隔離插柱


- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2
- ◎ 顏色: 本色
- ◎ 適用機孔 $\Phi 4.0\text{mm}$

品名 ITEM NO.	尺寸 Dimensions		包裝 PACKING
	A mm (in.)	D Φ mm	
MSP-3	3.2 (0.13")	4.0	2000 pcs / bag
MSP-6	6.3 (0.25")		
MSP-8	8.0 (0.32")		
MSP-10	10.5 (0.41")		
MSP-13	12.7 (0.50")		1000 pcs / bag
MSP-15	15.9 (0.62")		
MSP-19	19.1 (0.75")		

PC 板固定零件 P.C.B. FASTENERS



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Barbed arrow mounts on both ends locking securely
- For PCB / Chassis spacers



DUAL LOCKING SUPPORTS


(80) 雙鉤式隔離插柱

- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2
- ◎ 適用機孔 $\Phi 4.0\text{mm}$
- ◎ 雙鉤插式設計可承震動，適用一般 PC 板及電子零件之固定

品名 ITEM NO.	A mm	包裝 PACKING
DLS-5	4.8	1000 pcs / bag
DLS-6	6.4	
DLS-10	9.4	
DLS-12	12.7	
DLS-16	15.9	
DLS-19	19.1	
DLS-22	22.2	
DLS-25	25.4	



- Material: Nylon 6/6
- Flammability: UL 94V-2
- Attached M3 screw to chassis

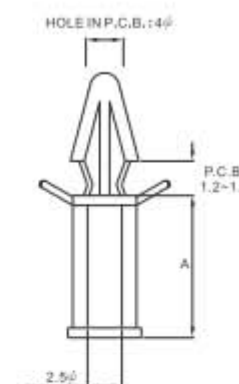

SCREW FASTENED CIRCUIT BOARD SUPPORT

(80) 平底式隔離插柱

- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2
- ◎ 一般用於不加底板之機器，固定後不會凸出底座

品名 ITEM NO.	A mm	螺絲 SCREW	包裝 PACKING
SBS-5	5	M3	1000 pcs / bag
SBS-10	10		
SBS-15	15		
SBS-20	20		
SBS-29	30		500 pcs / bag
SBS-35	35		




PC 板固定零件 P.C.B. FASTENERS



SLIDE SPACER SUPPORTS (80) 推式隔離柱

- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Insert support from larger hole and slide onto the smaller

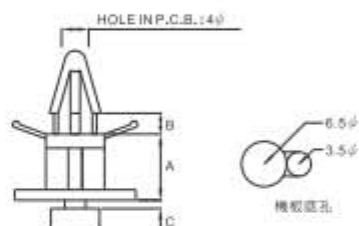


品名 ITEM NO.	尺寸 Dimensions			包裝 PACKING
	A mm	B mm	C mm	
SSS-6	6.4	1.5~2.3	0.8~1.5	1000 pcs / bag



REVERSE SPACER SUPPORT (80) PC板間隔柱

- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2
- ◎ 適用Φ4.0mm機板，底孔孔徑Φ5.5mm

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Snap into chassis and board holes with finger, insert from chassis hole underside
- Hole in P.C.B Φ4.0mm; Chassis dia.: Φ5.5mm

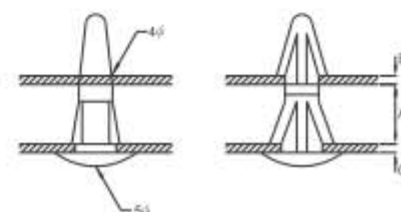


品名 ITEM NO.	尺寸 Dimensions			包裝 PACKING
	A mm	B mm	C mm	
RSS-6	6.4	1.6	0.8~1.2	1000 pcs / bag
RSS-8	8			
RSS-10	10			
RSS-12	12.7			
RSS-15	15.9			
RSS-19	19			



MUSHROOM SPACER SUPPORTS (80) 平頂隔離插柱

- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2
- ◎ 適用機孔Φ5.5mm

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Natural
- Hole in chassis dia.: Φ5.5mm



品名 ITEM NO.	尺寸 Dimensions		包裝 PACKING
	A mm (in.)	B mm	
MSS-5	5.0 (0.20")	10.0	1000 pcs / bag
MSS-6	6.4 (0.25")	10.0	
MSS-8	8.0 (0.32")	10.0	
MSS-10	10.0 (0.39")	10.0	
MSS-12	12.7 (0.50")	10.0	
MSS-14	14.0 (0.55")	10.0	
MSS-16	15.9 (0.62")	10.0	


PC 板固定零件 P.C.B. FASTENERS



PLASTIC SCREWS (86) 塑膠螺絲

- ◎ 材質: 採透明PC料或Nylon 6/6材質
- ◎ 用途: 適用PC板、機板

- Material: PC (Transparent) or Nylon 6/6
- Flammability: UL 94V-2
- For fixation of circuit board or electronic apparatus
- Excellent insulation, light weight, and no rust




樣式 TYPE	品 名 ITEM NO.	尺寸 Dimensions					包 裝 PACKING
		AΦ	B mm	C mm	D mm	螺距 PITCH mm	
	PS-306	3	6	2	5.5	0.5	1000 pcs / bag
	PS-308		8				
	PS-310		10				
	PS-312		12				
	PS-408	4	8	2.4	7	0.7	
	PS-410		10				
	PS-412		12				
	PS-414		14				
	PS-420		20				
	PS-425		25				
	PS-520	5	20	3	8.8	0.8	
	PS-530		30				
	PS-535		35				
	PS-620	6	20	3.5	10.3	1	
PS-630	30						
PS-640	40						
	PN-3	3	2.5	5.6		0.5	
	PN-4	4	3.2	7		0.7	
	PN-5	5	4	8		0.8	
	PN-6	6	5	10		1	



PUSH RIVETS (86) 推式鉚釘

- ◎ 材質: Nylon 6/6
- ◎ 防火等級: UL 94V-2
- ◎ 顏色: 黑色

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Black
- Installed with fingertip pressure
- Legs expand to securely fasten

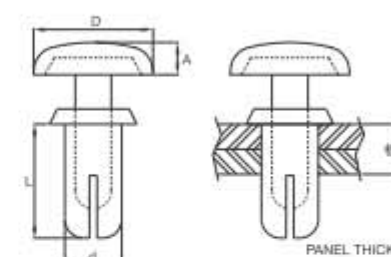

品名 ITEM NO.	尺寸 Dimensions				板厚 PANEL THICK	包裝 PACKING
	Φd mm	L mm	ΦD mm	A mm		
PR-3035	3	3.6	6.3	1.7	1~2	1000 pcs / bag
PR-3045		4.5			2~3	
PR-3055		5.5			3~4	
PR-3065		6.5			4~5	
PR-3075		7.5			5~6	
PR-3545	3.5	4.5	7.8	1.9	2~3	
PR-3550		5			2.5~3.5	
PR-4050	4	5	8.0	2	3.5~4.5	
PR-4060		6.1			4.5~5.5	
PR-4070		7.1				